



STATE LEVEL ENVIRONMENT IMPACT ASSESSMENT AUTHORITY

Environment department,
Room No. 217, 2nd floor,
Mantralaya, Annexe,
Mumbai- 400 032.
Date: November 10, 2019

To,
Ameet Nayak
at 5 & 5A, Kalwa Industrial Area, MIDC, Thane, Belapur Road, Airoli -Navi Mumbai, Thane 400708

Subject: Environment Clearance for Proposed Data Center Park

Sir,

This has reference to your communication on the above mentioned subject. The proposal was considered as per the EIA Notification - 2006, by the State Level Expert Appraisal Committee-II, Maharashtra in its 114th meeting and recommend the project for prior environmental clearance to SEIAA. Information submitted by you has been considered by State Level Environment Impact Assessment Authority in its 180th meetings.

2. It is noted that the proposal is considered by SEAC-II under screening category 8a (B2) as per EIA Notification 2006.

Brief Information of the project submitted by you is as below :-

1.Name of Project	Proposed Data Center Park by Data Center Holdings India LLP
2.Type of institution	Private
3.Name of Project Proponent	Ameet Nayak
4.Name of Consultant	M/s Sneha Hi-Tech Products, Bangalore
5.Type of project	Data Center Park with Office Building
6.New project/expansion in existing project/modernization/diversification in existing project	New Project
7.If expansion/diversification, whether environmental clearance has been obtained for existing project	Not applicable
8.Location of the project	5 & 5A, Kalwa Industrial Area, MIDC, Thane, Belapur Road, Airoli -Navi Mumbai, Thane 400708
9.Taluka	Thane
10.Village	Kalwa
Correspondence Name:	Ameet Nayak
Room Number:	--
Floor:	--
Building Name:	K1, Phase III, Country park
Road/Street Name:	Dattapada Road
Locality:	Opp. Tata Steel, Borivali (East)
City:	Mumbai
11.Whether in Corporation / Municipal / other area	MIDC
12.IOD/IOA/Concession/Plan Approval Number	IOD IOD/IOA/Concession/Plan Approval Number: EE/MHP-II/TTC/B-76038/of19 For proposed FSI 86,205.104 Sq.m Approved Built-up Area: 109368.983

SEIAA Meeting No: 180 Meeting Date: November 7, 2019 (SEIAA-STATEMENT-0000003165)
SEIAA-MINUTES-0000002692
SEIAA-EC-0000002077

Page 1 of 14


Shri. Anil Diggikar (Member Secretary SEIAA)

13.Note on the initiated work (If applicable)	NA
14.LOI / NOC / IOD from MHADA/ Other approvals (If applicable)	NA
15.Total Plot Area (sq. m.)	62,490.00 Sq.m.
16.Deductions	NA
17.Net Plot area	62,490.00 Sq.m.
18 (a).Proposed Built-up Area (FSI & Non-FSI)	FSI area (sq. m.): 86,205.104
	Non FSI area (sq. m.): 23,163.869
	Total BUA area (sq. m.): 109368.983
18 (b).Approved Built up area as per DCR	Approved FSI area (sq. m.): 86,205.104
	Approved Non FSI area (sq. m.): 23,163.869
	Date of Approval: 27-05-2019
19.Total ground coverage (m2)	27,941.84
20.Ground-coverage Percentage (%) (Note: Percentage of plot not open to sky)	44.71%
21.Estimated cost of the project	16875000000

Government of Maharashtra

22. Production Details				
Serial Number	Product	Existing (MT/M)	Proposed (MT/M)	Total (MT/M)
1	Not applicable	Not applicable	Not applicable	Not applicable
23. Total Water Requirement				
Dry season:	Source of water	MIDC		
	Fresh water (CMD):	81 (Drinking + Filter backwash + wash down points + AC, DG make up water)		
	Recycled water - Flushing (CMD):	9		
	Recycled water - Gardening (CMD):	62		
	Swimming pool make up (Cum):	NA		
	Total Water Requirement (CMD) :	152		
	Fire fighting - Underground water tank(CMD):	500		
	Fire fighting - Overhead water tank(CMD):	10		
	Excess treated water	00		
Wet season:	Source of water	MIDC		
	Fresh water (CMD):	81 (Drinking + Filter backwash + wash down points + AC, DG make up water)		
	Recycled water - Flushing (CMD):	9		
	Recycled water - Gardening (CMD):	00		
	Swimming pool make up (Cum):	NA		
	Total Water Requirement (CMD) :	90		
	Fire fighting - Underground water tank(CMD):	500		
	Fire fighting - Overhead water tank(CMD):	10		
	Excess treated water	00		
Details of Swimming pool (If any)		NA		

24.Details of Total water consumed									
Particulars	Consumption (CMD)			Loss (CMD)			Effluent (CMD)		
Water Requirement	Existing	Proposed	Total	Existing	Proposed	Total	Existing	Proposed	Total
Domestic	--	--	--	--	--	--	--	--	--
25.Rain Water Harvesting (RWH)	Level of the Ground water table:		9-10 m						
	Size and no of RWH tank(s) and Quantity:		Rain water storage tanks - 165 Cub-m x 4 nos. = 660.0 Cub-m						
	Location of the RWH tank(s):		Adjacent to office building .						
	Quantity of recharge pits:		--						
	Size of recharge pits :		--						
	Budgetary allocation (Capital cost) :		55 Lakh						
	Budgetary allocation (O & M cost) :		1.8 Lakh/annum						
	Details of UGT tanks if any :		Domestic UG tank Capacity (cum) :120 Flushing tank Capacity(cum): Part of S.T.P treated water storage tank. Capacity 8.5 Cub-m, Size : 2.1 x 2.1 x 1.95 m effective depth. Fire UG tank Capacity (cum): 500						
26.Storm water drainage	Natural water drainage pattern:		Natural slope towards Thane Belapur road						
	Quantity of storm water:		13.58 m3/min incremental run off						
	Size of SWD:		As per plan. Internal storm water drainage size of 450mm dia and external storm water drainage size of 600mm dia						
27.Sewage and Waste water	Sewage generation in KLD:		74						
	STP technology:		MBR (Membrane Bio Reactor)						
	Capacity of STP (CMD):		50 KLD x 2 nos.						
	Location & area of the STP:		Near to exit gate, area approx. 200 sqm.						
	Budgetary allocation (Capital cost):		12 Lakh						
	Budgetary allocation (O & M cost):		0.6 lakh/annum						

28.Solid waste Management

Waste generation in the Pre Construction and Construction phase:	Waste generation:	EXCAVATION: 2,921.07 m ³ top soil +1,20,000 m ³ excavated earth & MSW: 100 kg/d
	Disposal of the construction waste debris:	Excavated earth will be reused within site. Municipal Solid waste will be handed over to authorized agency
Waste generation in the operation Phase:	Dry waste:	36
	Wet waste:	24
	Hazardous waste:	Spent oil- 25 KL/year
	Biomedical waste (If applicable):	NA
	STP Sludge (Dry sludge):	150 kg/day
	Others if any:	E waste 100 kg/Year
Mode of Disposal of waste:	Dry waste:	Handed over to Authorized agency
	Wet waste:	Proposed to treat in OWC
	Hazardous waste:	Handed over to Authorized agency.
	Biomedical waste (If applicable):	NA
	STP Sludge (Dry sludge):	Used as manure.
	Others if any:	E waste handed over to Authorized agency.
Area requirement:	Location(s):	Next to office building. As shown on site plan
	Area for the storage of waste & other material:	20 sq.m.
	Area for machinery:	Included in above
Budgetary allocation (Capital cost and O&M cost):	Capital cost:	18 Lakh
	O & M cost:	0.9 lakh/annum

Government of
Maharashtra

29.Effluent Charecterestics					
Serial Number	Parameters	Unit	Inlet Effluent Charecterestics	Outlet Effluent Charecterestics	Effluent discharge standards (MPCB)
1	Not applicable	Not applicable	Not applicable	Not applicable	Not applicable
Amount of effluent generation (CMD):		Not applicable			
Capacity of the ETP:		Not applicable			
Amount of treated effluent recycled :		Not applicable			
Amount of water send to the CETP:		Not applicable			
Membership of CETP (if require):		Not applicable			
Note on ETP technology to be used		Not applicable			
Disposal of the ETP sludge		Not applicable			



Government of Maharashtra

30.Hazardous Waste Details							
Serial Number	Description	Cat	UOM	Existing	Proposed	Total	Method of Disposal
1	Spent (lube) oil	5.1	KL/year	NA	25	25	Authorized agency will be appointed

31.Stacks emission Details						
Serial Number	Section & units	Fuel Used with Quantity	Stack No.	Height from ground level (m)	Internal diameter (m)	Temp. of Exhaust Gases
1	118 Nos of DG set with capacity 2250 kVA	Diesel 470 Litres/hr/DG	3	30	0.5	475 °C

32.Details of Fuel to be used				
Serial Number	Type of Fuel	Existing	Proposed	Total
1	Diesel	00	470 Litres/hr/DG	470 Litres/hr/DG

33.Source of Fuel	Indian oil/Bharat Petroleum
34.Mode of Transportation of fuel to site	By Road

35.Energy		
Power requirement:	Source of power supply :	MSEDCL
	During Construction Phase: (Demand Load)	500kW
	DG set as Power back-up during construction phase	500 kVA
	During Operation phase (Connected load):	197 MW for entire project (246 MVA)
	During Operation phase (Demand load):	135 MW for entire project (169 MVA)
	Transformer:	2 Nos @ 150 MVA 220/11 KV
	DG set as Power back-up during operation phase:	118 Nos @ 2250 kVA standby application
	Fuel used:	Diesel
	Details of high tension line passing through the plot if any:	NA
Energy saving by non-conventional method:		

1. LED Light Fixtures with Timer & photo Electric sensors to save energy for internal, external & Landscape/Façade Lighting.
2. All cables shall be FRLHS & XLPE suitably de rated to avoid heating during use.
3. Copper conductor cables to be used for sizes of 16 sq mm & below to reduce losses & improve reliability/save energy.
4. Power factor shall be maintained to 0.95 or higher to reduce Electrical losses & save energy.
5. Energy Efficient Air conditioning units (minimum 3 star rating)
6. Selection of Efficient HVAC & Plumbing Equipment's
7. Solar energy

36.Detail calculations & % of saving:

Serial Number	Energy Conservation Measures	Saving %
1	LED Light Fixtures against Florescent/CFL fixtures	30% (Approximate)
2	Power factor improvement from 0.85 to 0.95 or higher	5 % (Approximate)
3	16 sq mm copper cable Vs 25 sq mm Al cable	2 % (Approximate)
4	HVAC Energy saving Equipment's 1 star Vs 3 star	20% (Approximate)
5	Electrical starter Vs VFD	20% (Approximate)
6	Normal Fixture Vs Low Flow Fixtures in plumbing system	30% (Approximate)
7	Solar PV 35 to 40 kW	53,000 kWh (53 MWh)-Generation

37.Details of pollution control Systems

Source	Existing pollution control system	Proposed to be installed
Sewage waste water	--	Sewage treatment Plan (STP)
Solid waste	--	Organic waste converter
Noise from DG set	--	DG Set with acoustic enclosures

Budgetary allocation (Capital cost and O&M cost):	Capital cost:	46.5 Lakh (For solar PV & energy conservation measures)
	O & M cost:	2.2 Lakh/ annum (For solar PV & energy conservation measures)

38.Environmental Management plan Budgetary Allocation

a) Construction phase (with Break-up):

Serial Number	Attributes	Parameter	Total Cost per annum (Rs. In Lacs)
1	Air	Water for dust suppression	1.44
2	Air	Air & Noise Monitoring	0.48
3	Water	Tanker Water For Construction	4.32
4	Water	Water monitoring	0.6
5	Land	Site Sanitation- Mobile toilets	16.8
6	Biological	Gardening Set Up and top soil preservation	10
7	Socio- Economic Environment	First Aid Facilities	2.4

8	Socio- Economic Environment	Health Check Up	0.8
9	Socio- Economic Environment	Creches For Children	6
10	Socio- Economic Environment	Personal Protective Equipment	4.9

b) Operation Phase (with Break-up):

Serial Number	Component	Description	Capital cost Rs. In Lacs	Operational and Maintenance cost (Rs. in Lacs/yr)
1	STP	50 KLD of 2 Nos	12	0.6
2	RWH	4 Rain water storage tanks	55	1.8
3	Solid waste management	OWC	18	0.9
4	Green Belt Development	Green Belt Development	70	2.5
5	Energy Use (Solar panel)	400 KW Solar Panels	40	2
6	Energy Saving measures	--	6.5	0.2
7	Environmental Monitoring	MoEF&CC approved laboratory	--	16.68

39.Storage of chemicals (inflamable/explosive/hazardous/toxic substances)

Description	Status	Location	Storage Capacity in MT	Maximum Quantity of Storage at any point of time in MT	Consumption / Month in MT	Source of Supply	Means of transportation
Diesel	Explosive	Front & site boundary wall	80 KL X 35 nos	80 KL X 35 nos	150 KL	Bharat Petroleum / Hindustan Petroleum	By tanker

40.Any Other Information

No Information Available

	CRZ/ RRZ clearance obtain, if any:	NA
	Distance from Protected Areas / Critically Polluted areas / Eco-sensitive areas/ inter-State boundaries	Airoli Mangroves 1 km towards west from project site
	Category as per schedule of EIA Notification sheet	8a (B2)
	Court cases pending if any	NA
	Other Relevant Informations	NA
	Have you previously submitted Application online on MOEF Website.	No
	Date of online submission	-

3. The proposal has been considered by SEIAA in its 180th meeting & decided to accord environmental clearance to the said project under the provisions of Environment Impact Assessment Notification, 2006 subject to implementation of the following terms and conditions:

Specific Conditions:

I	PP to upload the copy of partnership deed.
II	PP to upload the copy of IOD.
III	PP submitted the copy of CFO NoC for phase I. PP to obtain the CFO NoC from time to time.
IV	PP to ensure ECBC norms are complied with.
V	As presented by PP, PP to ensure that the project should be zero discharge project in dry season.
VI	As presented, PP to ensure that STP should be on ground open to sky.
VII	PP to explore the possibility to increase the energy saving by solar energy upto 2%.
VIII	PP during presentation informed that there will 400 employees in 3 shifts therefore there will not be more than 150 employees at one time and parking provided is 474 which is too high, therefore, committee asked PP to provide exact required parking & get it approved from local planning authority. PP to use those parking area as RG or to install solar panels.
IX	The PP to get NOC from competent authority with reference to Thane creek flamingo sanctuary if the project site falls within 10 Km radius from the said sanctuary boundary. The planning authority to ensure fulfilment of this condition before granting CC.
X	PP to submit CER prescribed by MoEF&CC circular dated 1.5.2018 relevant to the area and people around the project or Environment Department may direct PP to undertake CER work in identified area, as identified by Environment Department.
XI	PP to ensure that CER plan get approved from Municipal Commissioner/District Collector.
XII	PP Shall comply with Standard EC conditions mentioned in the Office Memorandum issued by MoEF & CC vide F.No.22-34/2018-IA.III dt.04.01.2019.
XIII	SEIAA decided to grant EC for FSI:86205.104 m2, Non-FSI: 23163.869 m2 and Total BUA: 109368.983 m2 (Plan Approval no-EE/MHP-II/TTC/B-76038 of 19, Date-27.05.2019)

General Conditions:

I	E-waste shall be disposed through Authorized vendor as per E-waste (Management and Handling) Rules, 2016.
II	The Occupancy Certificate shall be issued by the Local Planning Authority to the project only after ensuring sustained availability of drinking water, connectivity of sewer line to the project site and proper disposal of treated water as per environmental norms.

III	This environmental clearance is issued subject to obtaining NOC from Forestry & Wild life angle including clearance from the standing committee of the National Board for Wild life as if applicable & this environment clearance does not necessarily implies that Forestry & Wild life clearance granted to the project which will be considered separately on merit.
IV	PP has to abide by the conditions stipulated by SEAC& SEIAA.
V	The height, Construction built up area of proposed construction shall be in accordance with the existing FSI/FAR norms of the urban local body & it should ensure the same along with survey number before approving layout plan & before according commencement certificate to proposed work. Plan approving authority should also ensure the zoning permissibility for the proposed project as per the approved development plan of the area.
VI	If applicable Consent for Establishment" shall be obtained from Maharashtra Pollution Control Board under Air and Water Act and a copy shall be submitted to the Environment department before start of any construction work at the site.
VII	All required sanitary and hygienic measures should be in place before starting construction activities and to be maintained throughout the construction phase.
VIII	Adequate drinking water and sanitary facilities should be provided for construction workers at the site. Provision should be made for mobile toilets. The safe disposal of wastewater and solid wastes generated during the construction phase should be ensured.
IX	The solid waste generated should be properly collected and segregated. dry/inert solid waste should be disposed off to the approved sites for land filling after recovering recyclable material.
X	Disposal of muck during construction phase should not create any adverse effect on the neighboring communities and be disposed taking the necessary precautions for general safety and health aspects of people, only in approved sites with the approval of competent authority.
XI	Arrangement shall be made that waste water and storm water do not get mixed.
XII	All the topsoil excavated during construction activities should be stored for use in horticulture / landscape development within the project site.
XIII	Additional soil for leveling of the proposed site shall be generated within the sites (to the extent possible) so that natural drainage system of the area is protected and improved.
XIV	Green Belt Development shall be carried out considering CPCB guidelines including selection of plant species and in consultation with the local DFO/ Agriculture Dept.
XV	Soil and ground water samples will be tested to ascertain that there is no threat to ground water quality by leaching of heavy metals and other toxic contaminants.
XVI	Construction spoils, including bituminous material and other hazardous materials must not be allowed to contaminate watercourses and the dumpsites for such material must be secured so that they should not leach into the ground water.
XVII	Any hazardous waste generated during construction phase should be disposed off as per applicable rules and norms with necessary approvals of the Maharashtra Pollution Control Board.
XVIII	The diesel generator sets to be used during construction phase should be low sulphur diesel type and should conform to Environments (Protection) Rules prescribed for air and noise emission standards.
XIX	The diesel required for operating DG sets shall be stored in underground tanks and if required, clearance from concern authority shall be taken.
XX	Vehicles hired for bringing construction material to the site should be in good condition and should have a pollution check certificate and should conform to applicable air and noise emission standards and should be operated only during non-peak hours.
XXI	Ambient noise levels should conform to residential standards both during day and night. Incremental pollution loads on the ambient air and noise quality should be closely monitored during construction phase. Adequate measures should be made to reduce ambient air and noise level during construction phase, so as to conform to the stipulated standards by CPCB/MPCB.
XXII	Fly ash should be used as building material in the construction as per the provisions of Fly Ash Notification of September 1999 and amended as on 27th August, 2003. (The above condition is applicable only if the project site is located within the 100Km of Thermal Power Stations).
XXIII	Ready mixed concrete must be used in building construction.
XXIV	Storm water control and its re-use as per CGWB and BIS standards for various applications.
XXV	Water demand during construction should be reduced by use of pre-mixed concrete, curing agents and other best practices referred.
XXVI	The ground water level and its quality should be monitored regularly in consultation with Ground Water Authority.

XXVII	The installation of the Sewage Treatment Plant (STP) should be certified by an independent expert and a report in this regard should be submitted to the MPCB and Environment department before the project is commissioned for operation. Discharge of this unused treated effluent, if any should be discharge in the sewer line. Treated effluent emanating from STP shall be recycled/refused to the maximum extent possible. Discharge of this unused treated effluent, if any should be discharge in the sewer line. Treatment of 100% gray water by decentralized treatment should be done. Necessary measures should be made to mitigate the odour problem from STP.
XXVIII	Permission to draw ground water and construction of basement if any shall be obtained from the competent Authority prior to construction/operation of the project.
XXIX	Separation of gray and black water should be done by the use of dual plumbing line for separation of gray and black water.
XXX	Fixtures for showers, toilet flushing and drinking should be of low flow either by use of aerators or pressure reducing devices or sensor based control.
XXXI	Use of glass may be reduced up to 40% to reduce the electricity consumption and load on air conditioning. If necessary, use high quality double glass with special reflective coating in windows.
XXXII	Roof should meet prescriptive requirement as per Energy Conservation Building Code by using appropriate thermal insulation material to fulfill requirement.
XXXIII	Energy conservation measures like installation of CFLs /TFLs for the lighting the areas outside the building should be integral part of the project design and should be in place before project commissioning. Use CFLs and TFLs should be properly collected and disposed off/sent for recycling as per the prevailing guidelines/rules of the regulatory authority to avoid mercury contamination. Use of solar panels may be done to the extent possible like installing solar street lights, common solar water heaters system. Project proponent should install, after checking feasibility, solar plus hybrid non-conventional energy source as source of energy.
XXXIV	Diesel power generating sets proposed as source of backup power for elevators and common area illumination during operation phase should be of enclosed type and conform to rules made under the Environment (Protection) Act, 1986. The height of stack of DG sets should be equal to the height needed for the combined capacity of all proposed DG sets. Use low sulphur diesel. The location of the DG sets may be decided with in consultation with Maharashtra Pollution Control Board.
XXXV	Noise should be controlled to ensure that it does not exceed the prescribed standards. During nighttime the noise levels measured at the boundary of the building shall be restricted to the permissible levels to comply with the prevalent regulations.
XXXVI	Traffic congestion near the entry and exit points from the roads adjoining the proposed project site must be avoided. Parking should be fully internalized and no public space should be utilized.
XXXVII	Opaque wall should meet prescriptive requirement as per Energy Conservation Building Code, which is proposed to be mandatory for all air-conditioned spaces while it is aspiration for non-air-conditioned spaces by use of appropriate thermal insulation material to fulfill requirement.
XXXVIII	The building should have adequate distance between them to allow movement of fresh air and passage of natural light, air and ventilation.
XXXIX	Regular supervision of the above and other measures for monitoring should be in place all through the construction phase, so as to avoid disturbance to the surroundings.
XL	Under the provisions of Environment (Protection) Act, 1986, legal action shall be initiated against the project proponent if it was found that construction of the project has been started without obtaining environmental clearance.
XLI	Six monthly monitoring reports should be submitted to the Regional office MoEF, Bhopal with copy to this department and MPCB.
XLII	Project proponent shall ensure completion of STP, MSW disposal facility, green belt development prior to occupation of the buildings. As agreed during the SEIAA meeting, PP to explore possibility of utilizing excess treated water in the adjacent area for gardening before discharging it into sewer line No physical occupation or allotment will be given unless all above said environmental infrastructure is installed and made functional including water requirement in Para 2. Prior certification from appropriate authority shall be obtained.
XLIII	Wet garbage should be treated by Organic Waste Converter and treated waste (manure) should be utilized in the existing premises for gardening. And, no wet garbage will be disposed outside the premises. Local authority should ensure this.
XLIV	Local body should ensure that no occupation certification is issued prior to operation of STP/MSW site etc. with due permission of MPCB.
XLV	A complete set of all the documents submitted to Department should be forwarded to the Local authority and MPCB.
XLVI	In the case of any change(s) in the scope of the project, the project would require a fresh appraisal by this Department.
XLVII	A separate environment management cell with qualified staff shall be set up for implementation of the stipulated environmental safeguards.

XLVIII	Separate funds shall be allocated for implementation of environmental protection measures/EMP along with item-wise breaks-up. These cost shall be included as part of the project cost. The funds earmarked for the environment protection measures shall not be diverted for other purposes and year-wise expenditure should reported to the MPCB & this department.
XLIX	The project management shall advertise at least in two local newspapers widely circulated in the region around the project, one of which shall be in the Marathi language of the local concerned within seven days of issue of this letter, informing that the project has been accorded environmental clearance and copies of clearance letter are available with the Maharashtra Pollution Control Board and may also be seen at Website at http://ec.maharashtra.gov.in .
L	Project management should submit half yearly compliance reports in respect of the stipulated prior environment clearance terms and conditions in hard & soft copies to the MPCB & this department, on 1st June & 1st December of each calendar year.
LI	A copy of the clearance letter shall be sent by proponent to the concerned Municipal Corporation and the local NGO, if any, from whom suggestions/representations, if any, were received while processing the proposal. The clearance letter shall also be put on the website of the Company by the proponent.
LII	The proponent shall upload the status of compliance of the stipulated EC conditions, including results of monitored data on their website and shall update the same periodically. It shall simultaneously be sent to the Regional Office of MoEF, the respective Zonal Office of CPCB and the SPCB. The criteria pollutant levels namely; SPM, RSPM, SO ₂ , NO _x (ambient levels as well as stack emissions) or critical sector parameters, indicated for the project shall be monitored and displayed at a convenient location near the main gate of the company in the public domain.
LIII	The project proponent shall also submit six monthly reports on the status of compliance of the stipulated EC conditions including results of monitored data (both in hard copies as well as by e-mail) to the respective Regional Office of MoEF, the respective Zonal Office of CPCB and the SPCB.
LIV	The environmental statement for each financial year ending 31st March in Form-V as is mandated to be submitted by the project proponent to the concerned State Pollution Control Board as prescribed under the Environment (Protection) Rules, 1986, as amended subsequently, shall also be put on the website of the company along with the status of compliance of EC conditions and shall also be sent to the respective Regional Offices of MoEF by e-mail.

Government of Maharashtra

4. The environmental clearance is being issued without prejudice to the action initiated under EP Act or any court case pending in the court of law and it does not mean that project proponent has not violated any environmental laws in the past and whatever decision under EP Act or of the Hon'ble court will be binding on the project proponent. Hence this clearance does not give immunity to the project proponent in the case filed against him, if any or action initiated under EP Act.

5. In case of submission of false document and non-compliance of stipulated conditions, Authority/ Environment Department will revoke or suspend the Environment clearance without any intimation and initiate appropriate legal action under Environmental Protection Act, 1986.


6. The Environment department reserves the right to add any stringent condition or to revoke the clearance if conditions stipulated are not implemented to the satisfaction of the department or for that matter, for any other administrative reason.

7. Validity of Environment Clearance: The environmental clearance accorded shall be valid as per EIA Notification, 2006, and amendments by MoEF&CC Notification dated 29th April, 2015.

8. In case of any deviation or alteration in the project proposed from those submitted to this department for clearance, a fresh reference should be made to the department to assess the adequacy of the condition(s) imposed and to incorporate additional environmental protection measures required, if any.

9. The above stipulations would be enforced among others under the Water (Prevention and Control of Pollution) Act, 1974, the Air (Prevention and Control of Pollution) Act, 1981, the Environment (Protection) Act, 1986 and rules there under, Hazardous Wastes (Management and Handling) Rules, 1989 and its amendments, the public Liability Insurance Act, 1991 and its amendments.

10. Any appeal against this Environment clearance shall lie with the National Green Tribunal (Western Zone Bench, Pune), New Administrative Building, 1st Floor, D- Wing, Opposite Council Hall, Pune, if preferred, within 30 days as prescribed under Section 16 of the National Green Tribunal Act, 2010.

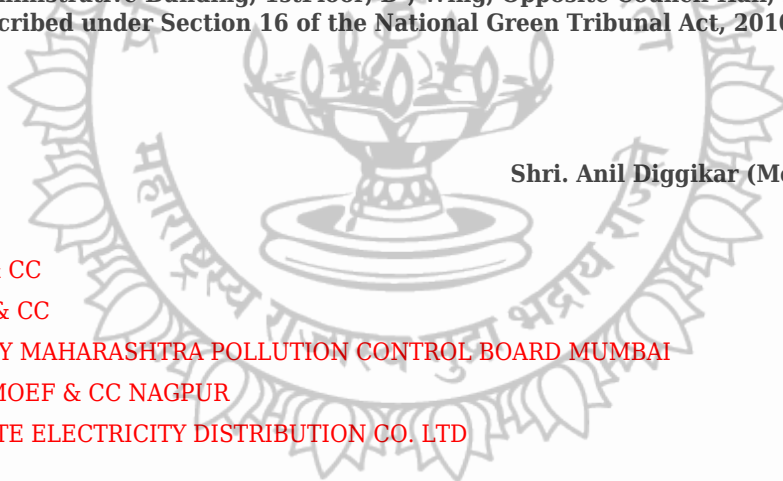

Shri. Anil Diggikar (Member Secretary SEIAA)

Copy to:

1. SECRETARY MOEF & CC
2. IA- DIVISION MOEF & CC
3. MEMBER SECRETARY MAHARASHTRA POLLUTION CONTROL BOARD MUMBAI
4. REGIONAL OFFICE MOEF & CC NAGPUR
5. MAHARASHTRA STATE ELECTRICITY DISTRIBUTION CO. LTD

**Government of
Maharashtra**